


SEMPERIT-FLEXICHEM-MOBIL



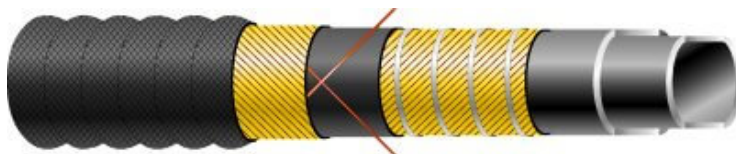






Chemical - UPEL - 10 bar - S&D - EN12115 - flat corrugated



SPECIFICATIONS

Application	Flexichem Mobil has been specially developed for use in tankers used to transport chemicals. Suitable for the transport of acids, alkalis, salts, organic compounds [alcohols, esters, ketones, etc.] incl. aromatic substances, chlorinated hydrocarbons and oxidising acids [see our chemical resistance list].
Feature	The UPE tube has an extremely low friction coefficient and good abrasion resistance. Very robust but also extremely flexible, due to special spiral design.
Standard/Approval	EN 12115:2021, TRbF 131/2:1992. Cover meets UL94 HB.
Temperature range	Tube depending on the flow medium up to +100°C. Hose flexible down to -35°C. Steam cleaning without pressure up to 130°C / max. 30 min.
Safety factor	4 : 1
Tube	UPE, black, electrically conductive, smooth.
Reinforcement	Textile wrapped, zinc plated steel wire helix, 2 crossed copper wires.
Cover	EPDM, black, resistant to ozone and weather, abrasion resistant, electrically conductive, flat corrugated with cloth impression.
Marking	continuous mylartape, white letters, blue tape: "SEMPERIT [S] Chemie FLEXICHEM Mobil PN 10 bar", as well as continuous embossed tape: "SEMPERIT [S] FLEXICHEM MOBIL EN12115:2021 TRbF 131/2 SD NW X PN 10 bar Ω/ T XQ/YY".
Notice	Further development of the UPEL Mobil hose. Due to the elongation of the special spiral design, we recommend a maximum pressure of 6 bar, as is normal for filling operations. ATTENTION: The temperature of the medium must be lower than its boiling point. ATTENTION: Please refer to the Semperit resistance list or, in case of doubt, contact Semperit. ATTENTION: Continuous use at the peak values reduces the service life. ATTENTION: To ensure the assembly is leakproof, it must be tested according to EN 12115:2021.

TECHNICAL DETAILS

								
Article number	Internal-Ø	Wall width	External-Ø	Work. pressure [max.]	Number of inserts	Bending radius [min.]	Weight approx.	Coil length [max.]
	mm	mm	mm	bar		mm	kg/m	m
64375 5080	50.0	8.0	66.0	10	2	150	2.20	40
64375 7580	75.0	8.0	91.0	10	2	200	3.10	40
64375 0080	100.0	8.0	116.0	10	2	350	3.90	40

Vacuum resistance to -0.9 bar

Please note: Before using our products with new or untested media, or for applications that are not clearly indicated in the product information, written advice must be obtained from a specialist dealer or a Semperit application engineer. For safety reasons, all products must be inspected regularly for operational safety and replaced in the event of any damage [especially of the cover] or unusual signs of wear and tear. All products must be stored, handled, and maintained in accordance with all our respective instructions and DIN 7716:1982. The information in our catalogue as well as each individual datasheet is subject to change at any time without notice since we are constantly developing and improving our products and due to constant technical developments after the latest release date of the catalogue and/or individual datasheets. To always have the latest product and safety information make sure you visit our website [hoses.semperitgroup.com] regularly or contact one of our specialist dealers or a Semperit application engineer. All contracts concluded with us are exclusively subject to our general terms and conditions [available at semperitgroup.com]. Additional important general information about the range, choice and safe use of our products can be found at our website [hoses.semperitgroup.com] and must be followed without exception.

Important notice: Our catalogue and any individual datasheet have been prepared with great care in order to provide you with all the information you need. The information contained therein is based on the state-of-the-art industrial technology and many years of experience and testing; whenever indicated for a certain product, we also confirm conformity with the resistance requirements of the media listed in ISO TR 7620:2005(E). However, the individual conditions of storage, maintenance and use decisively affect the safe and durable use of each product. The quality and safety of our products as indicated in the catalogue or individual datasheets are therefore strictly subject to your continuous observance of all specifications and restrictions in our written product information and applicable laws and standards, the specifications regarding resistance to chemicals and our cleaning procedures. We reject any liability for safety issues or other consequences due to improper product choice, maintenance, or handling [e.g. squashing, rupturing, stretching, or filling with non-approved media]. Our products must not be used in airplanes or other aerial vehicles under any circumstance. Products delivered by us to the USA are manufactured according to IRPM-IP2, unless specified otherwise. All other hoses are manufactured according to EN ISO 1307:2008, unless specified otherwise. Our products are not designated for the sale to the general public and do not fulfill the conditions for "GS-certification", unless stated otherwise in the product datasheet.